



80x80x20mm




■ P-Q Curve (At Rated Voltage)

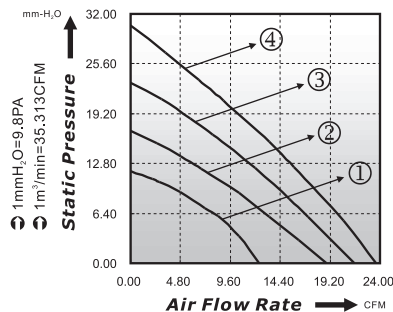

■ Dimensions Drawing

Unit: (mm)

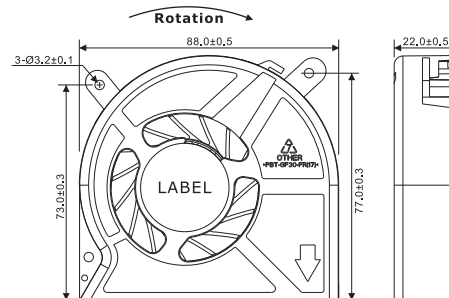

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
PLB08020B12L	○▲●⊖	12	0.30	3.60	3500	12.40	11.86	40.5	1
PLB08020B12M	○▲●⊖	12	0.40	4.80	4000	17.00	18.84	44.8	2
PLB08020B12H	○▲●⊖	12	0.60	7.20	4500	23.20	21.52	48.0	3
PLB08020B12HH	○▲●⊖	12	0.70	8.40	5000	30.50	23.61	51.1	4

* Bearing Type: ○ Sleeve ▲ One Ball and One Sleeve ● Two Ball ⊖ Hydro-Dynamic